



USER MANUAL

XDS-158X

Series

Idea 15.6" All-In-One Meeting Room Signboard with NFC & RFID, optional HID, and Touch





Package content:



Smart signboard




Flush mount bracket
with screw



Power adapter with
changeable plug

Physical views and features:

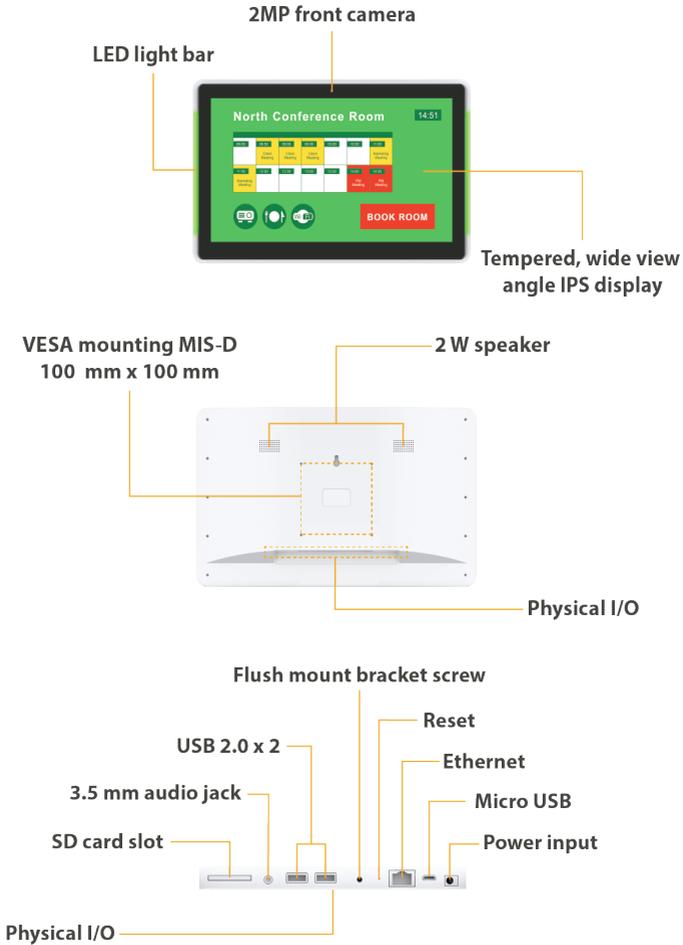

Installation:

Significant temperature deviations and changes in elevation or environment can lead the glass panel of the smart signboard to trap a slight amount of moisture. To avoid damaging the smart signboard, the condensation will require at least 2 - 4 hours to evaporate prior to usage.


Users are recommended to keep the flush mount bracket in direct contact with the to-be-mounted surface when operating the smart signboard to ensure the weight of the device is fully supported by the flush mount.

Mounting with VESA compatible mounting interface


This smart signboard accepts a MIS-D (100 mm x 100 mm) VESA-Compliant mounting interface and the recommended screw is M3 x 7.5 mm excluding bracket thickness. Use the flush mount screw provided in-box to easily install the flush mount bracket onto the smart signboard.

Mounting with flush mount bracket and screw

- 1 Mount the bracket to the to-be-mounted surface with the supplied KA4 x 30 mm screws.
- 2 Secure the smart signboard to the bracket by joining the pocket at the back of the smart signboard to the hook located at the top section of the bracket.




- 3 Firmly slide the smart signboard downwards to ensure the pocket and the hook are properly latched together.
- 4 Fasten the flush mount bracket screw, which is only accessible from the bottom plane of the mounted smart signboard, by using a Phillips-head screwdriver.



Setting Up:


- 1 Plug in the AC adapter and Ethernet cable (if that is the preferred method of connecting to network) located at the back of the smart signboard and it will power on automatically. Once the user has exited the boot up screen, users can go through system configurations in both landscape and por-trait orientations.
- 2 When boot up is complete, the user will see the “**Basic settings**” which allows the user to make configurations or autoplay pre-loaded content. Please note, the smart signboard is set to autoplay pre-loaded content 15 seconds after boot up. This can be canceled if “**Cancel autoplay in 15s**” is selected which lets the user remain on the “**Basic settings**” and initiate playback manually.



3 To change smart signboard system language of the XDS-158X series, use touch or USB mouse to select “**(Current Language) ...**” For system configurations, select “**Advanced.**” Important recommend-ed configurations:

- 1 Set correct time, date, and time zone for properly scheduled playback.
- 2 Set password to prevent unautho-rized access during setup menu.
- 3 Set network for establishing network connection.
- 4 Enable NFC keyboard in Wireless & networks if NFC feature is required.

4 Users can set content by clicking "Set Content" to enter the URL or use the desired content management system to upload the contents onto the smart sign-board.



Reset smart signboard to factory default

- 1 Use a pen to press and hold the reset button - do not release until Step 4.
- 2 Insert the power cord.
- 3 Wait 30 seconds for the system reboot indicating your data is erased.
- 4 Release the reset button and your smart signboard will initialize in facto-ry default state.

Technical Specification:

Display	15.6" LCD panel 10 points capacitive multi-touch 300 nits maximum brightness 1920 x 1080 (Full HD) panel resolution Viewing angle (H/V): 178/178
Internal Player	Processor: Cortex-A17 1.8 GHz Quad-Core System memory: 2.0 GB Flash memory: 8 GB eMMC built-in
Video Format Supported	H.264/AVC up to 1080p (1920 x 1080) H.265/AVC up to 1080p (1920 x 1080) MPEG-4 up to 1080p (1920 x 1080) MPEG-2 up to 1080p (1920 x 1080) MPEG-1 up to 1080p (1920 x 1080) VC-1 up to 1080p (1920 x 1080)
Image Format Supported	JPEG up to 1920 x 1080 PNG up to 1920 x 1080
Audio Format Supported	MP3 up to 320 Kbps
Open Standards Supported	W3C HTML5 (HTML, JavaScript, CSS) W3C SMIL 3.0 instructions (sub-set)
Interactivity	GPIO via PIO-102 module (optional) 13.56 MHz NFC & 125 KHz RFID (available for XDS-1588-A)

Connectivity	<p>SD card slot (expendable to 64 GB)</p> <p>Micro USB for ADB (Android Debug Bridge)</p> <p>3.5 mm audio out</p> <p>USB 2.0 x 2</p> <p>Ethernet port x 1</p> <p>Power jack x 1</p> <p>Embedded wireless antenna</p> <p>Built-in stereo speaker 2 W x 2</p> <p>Front camera: 2MP</p>
Supplied Accessories	<p>Flush mount bracket and screw</p> <p>Power adapter with changeable plug (optional for EU, UK, AU)</p>
Optional Accessories	<p>IAdea PTM-101 tilt mount</p>
Power Requirement	<p>Input: AC 100 - 240 V, 50 - 60 Hz</p> <p>Output: 12 V / 2 A</p> <p>Power-over-Ethernet (PoE+) single-wire installation</p>
Power consumption	<p>Average 13 W</p>
Environmental	<p>Operating temperature: 0 – 40 °C / 32 – 104 °F</p> <p>Humidity: 10 – 85 % @ 45 °C / 113 °F non-condensing</p>
System Dimension	<p>402 mm x 253 mm x 30 mm</p> <p>(15.82" x 9.96" x 1.19")</p>
System Weight	<p>1320 g (2.917 lb)</p>
Certifications	<p>CE / FCC / RoHS</p>
Warranty	<p>1-year limited parts & labor (varies based on region, contact sales for more details)</p>



Available SKU:

XDS-1588	IAdea standard.
XDS-1588-A	IAdea standard with NFC & RFID embedded.
XDS-1588-H	IAdea standard with HID module embedded.



IAdea Headquarters

3F, No.21, Lane 168, Xiangshan Road
Taipei, Taiwan 114
Phone: +886-2-2791-1110
Fax: +886-2-2791-1170
Email: sales@IAdea.com

IAdea America Corp.

20 Fairbanks, suite 170
Irvine, CA 92618
USA
Phone: +1-949-305-6489
Email: us-sales@IAdea.com