



# IAdea GPIO Extender Application Note

## Contents

Introduction .....	1
What is GPIO Extender? .....	1
Digital Input and Output Applications .....	2
Wiring Instructions .....	3
Software Instructions .....	6
Setup Example – Button Trigger Application.....	9

## Introduction

Digital Input and Digital Output are both common applications when user wants to create interactive and automated scenario. IAdea GPIO extender intends to give Digital Signage user the freedom to create unlimited scenarios.

This document will firstly brief the GPIO applications can be deployed in the field. With the basic understanding user can start to plan and set up the project by referencing the easy understanding instructions.

## What is GPIO Extender?

Digital Input allow you to connect the IAdea players to external devices such as motion sensors, sound sensors, door detectors, buttons , alarm systems. With appropriate software setup, IAdea signage players can react to different inputs based on customer configurations.

Digital Output allow you to connect IAdea players to external devices such as LED light, door control, speaker, or even another IAdea player to create fully interactive Digital Signage experience.



## **Digital Input and Output Applications**

### **Kiosk**

Kiosk is the most conventional usage for input applications. By connecting buttons or other trigger source, the signage system can start to display the requested information.

### **Education**

By connecting the alarm system, the signage system in campus can be used as emergency alert device to protect the children safety.

### **Hospitality**

By connecting the interactive buttons, the signage system in the hotel lobby will turn into a fully interactive navigator. User can check the floor plan, conference room information, store map and cuisine information on DEMAND.

### **Retail**

By connecting the motion sensor, the signage system can display different content based on the distance between customer and signage board. In the close spot, a point of purchase commercial can be displayed to attract user to grab something near to them. In the far spot, the general store discount information can be displayed.

Imagine looking for a PLUG in the home depot, the category sign hang up in the air looks all similar and confusing. By connecting the button as input device and LED light as output device, customer can quickly find the correct category of what they need and be indicated by flashing LED light.

### **Car Entrance**

By connecting the external License Plate Recognize system, the host information can be displayed in the screen to create a dynamic welcome sign.

### **Power Saving**

By connecting the motion sensor, the signage system can turn on the monitor display once when user approaches. This robust the power efficiency in all kind of deployments.

### **Door Contact**

By connecting the door contact as input device, the signage system can display whatever interests to user. Imagine in squash courts, while user enter the court, the signage display can start to showcase the eclipsed time based on their lease plan.

## Wiring Instructions


Wiring is easy and simple for IAdea GPIO extender.

### Wiring Input/Output cable :

1. Lose the terminal block with screw driver:



2. Attach the cable:

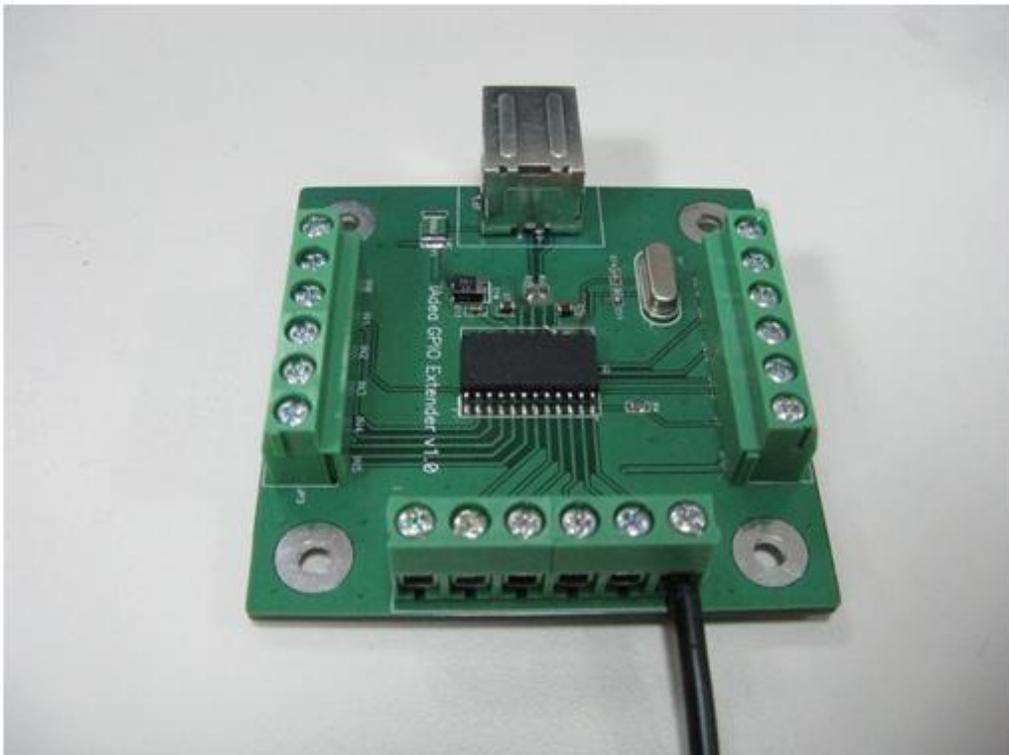


3. Fasten the terminal block with screw driver:



**Wiring Ground Cable:**

Wiring ground cable to GPIO extender works exactly as wiring signal cable. Please note IAdea GPIO extender is a common ground point design.

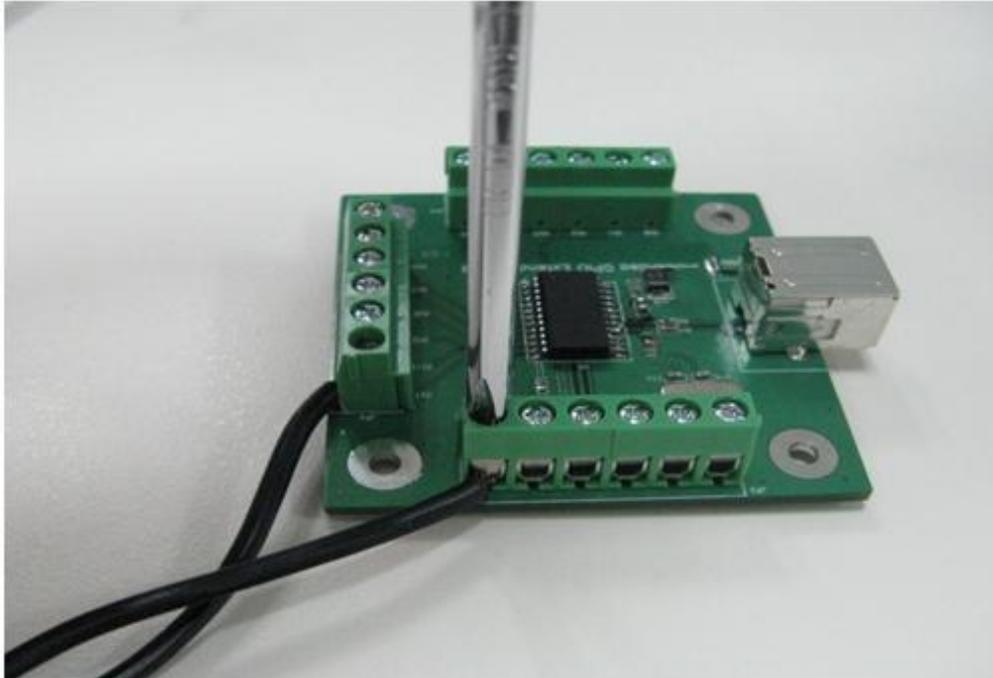



## Software Instructions

---

You will be able to program content and playlists using SMIL, HTML5, and Android.

### **For SMIL User**

Please check <http://www.a-smil.org/index.php/Interactivity>. A simple SMIL code triggering 4 media items to play on button press can be as short as 30 lines of code.

## Application Example

---

### **For Application Example**


Please visit our main website at : <http://www.iadea.com/solution/application/lift-and-learn>

## Setup Example - Button Trigger Application


This section exhibits to users a setup example for a 2 button trigger application.

### Wiring

(1) Attach (-) from button to IN0 & IN1 respectively.

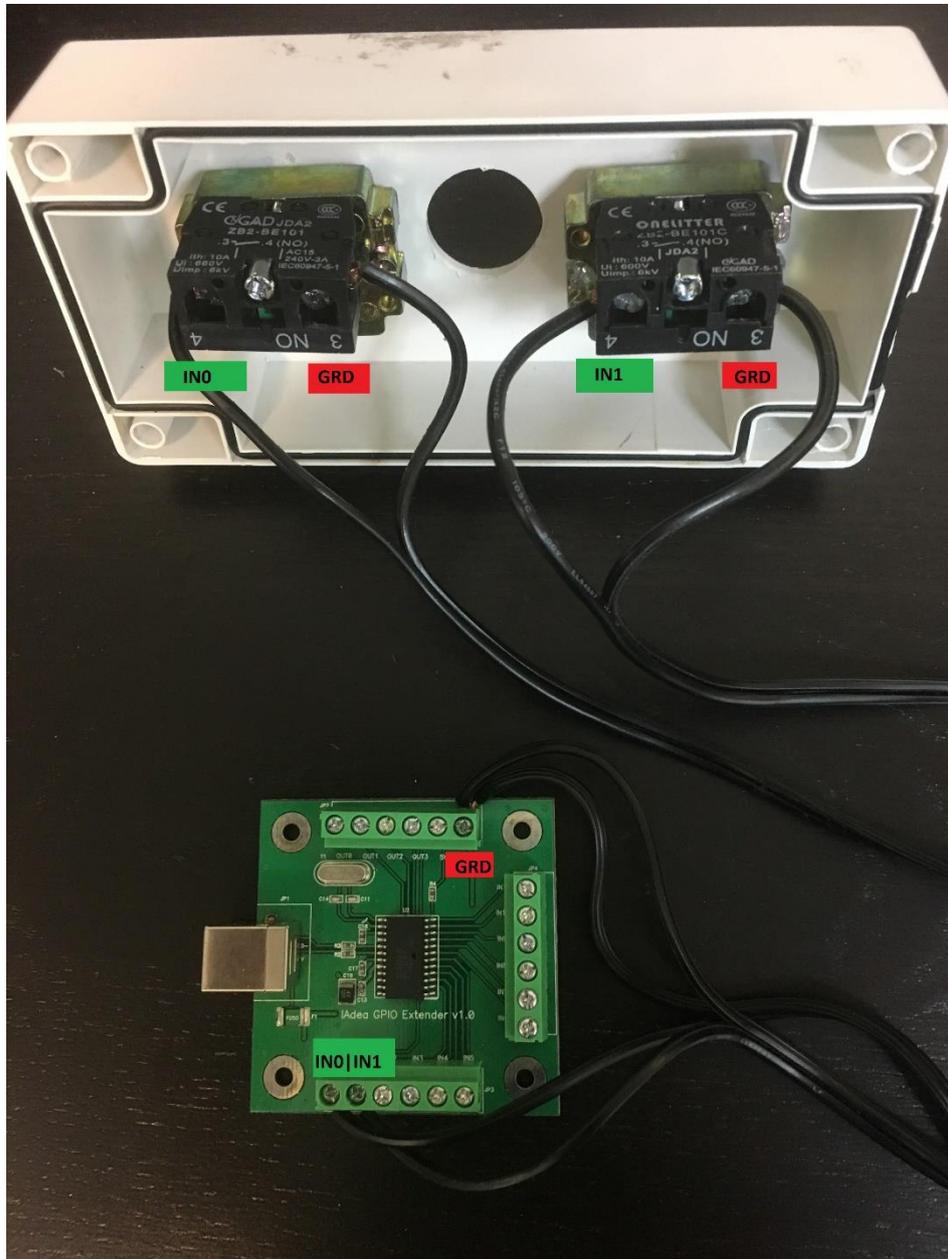

(2) Connect GPIO extender to IAdea player USB port **before power on player.**

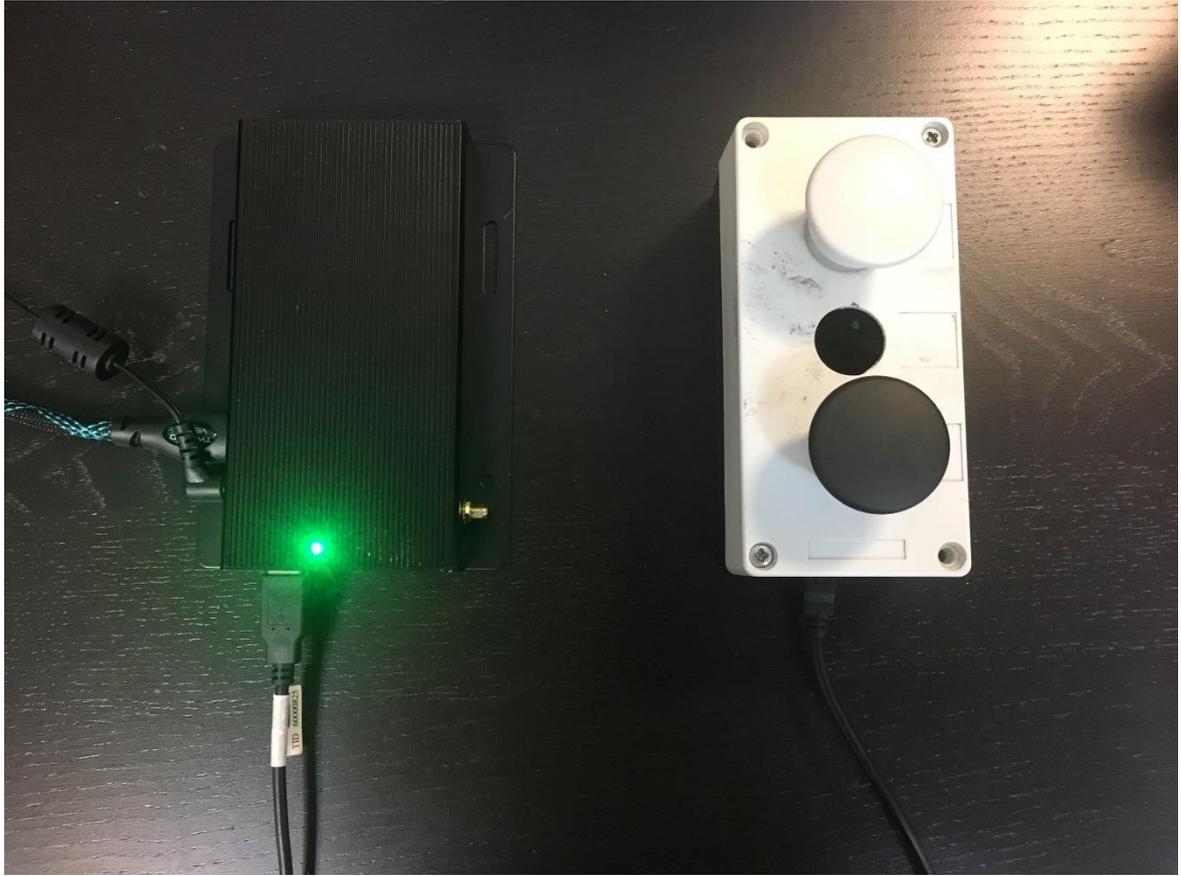

## Technical Specification

### For use with

- IAdea XMP-320, 330, 340
- IAdea XDS-195, 245

### Ports

- 10 input ports: short to ground for "on", free floating for "off"
- 4 output ports: short to ground for "on", high-impedance for "off" (open-drain)
- 5V: output range 4V-5V, max 250mA, for powering small sensors and LEDs
- GND: ground port

### Package includes

- GPIO module x 1
- USB cable x 1 (type A-B, 3 ft/1M)

### Connectors

- 10 input ports: pull to 5V or free floating for "on", short to ground for "off"
- Euro-type terminals, pitch 5mm, wire gauge: 16-22 AWG

### Maximum ratings

- Input range: 0 to 5V DC
- Output current: 20mA per port
- Total output port current: 50mA
- DC power current: 250mA

*Exceeding maximum rating on the I/O ports can void your warranty permanently damage the I/O module and media appliance.*

### Input requirement

- OFF (inactive state): open (high-impedance) or 4V to VCC
- ON (active state): 0V to 0.7V

### Output current limits

- Max output from VCC: 400mA
- Max sink to output pin: 20mA

### Environmental

- Operating temperature: 0 to 40° C
- Humidity 5 – 85% @ 40° C non-condensing

### Dimensions (WxDxH)


- 2.7" x 2.4" x 0.6" (68mm x 60mm x 16 mm)

### Weight


- 0.07 lbs. (0.15kg)

### Warranty

1-year limited parts & labor

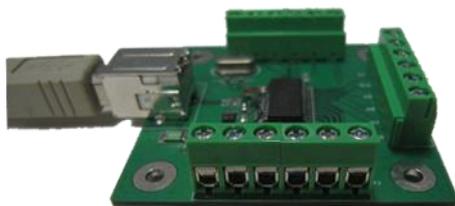

**Euro-type terminal blocks**

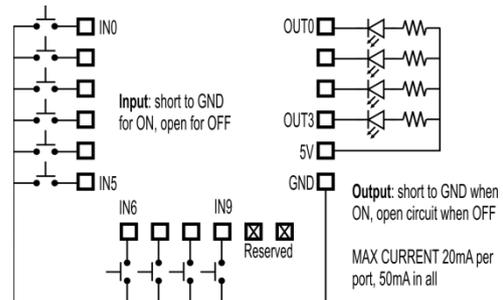

**Application circuit**